Toolkit:
Energy efficient building design

Buildings: Session 3

Buildings energy efficiency sessions in partnership with:

BEEP

INDO-SWISS BUILDING ENERGY EFFICIENCY PROJECT

UCL ENERGY INSTITUTE

UCL

Energy Efficiency Training Week: Buildings Program

1. **Where to start:** Understanding energy use in buildings
2. **Where to start:** Energy efficiency potential in buildings
3. **Toolkit:** Energy efficient building design
4. **Toolkit:** Energy efficient building technologies

   Where do I get help? IEA's Technology Collaboration Programmes
5. **Toolkit:** Enabling investment with energy efficiency policies
6. **What are the steps :** Building energy codes and standards

   Site Visit: Schneider Electric
7. **What are the steps:** Set targets and develop policies
8. **Did it work:** Evaluating the multiple benefits of energy efficiency
9. **Did it work:** Tracking progress with energy efficiency indicators

   Where do I get help? International and regional energy efficiency initiatives
10. **Energy Efficiency Quiz:** Understanding energy efficiency in buildings

© OECD/IEA 2018

3. Toolkit: Energy efficient building design

Trainers: Brian Dean and Pierre Jaboyedoff

Session: 1.5 hours

Purpose: To teach the fundamentals of how building design can reduce energy use in buildings. This course will also describe how an integrated design process and the use of simulation tools can achieve cost effective and energy efficient buildings.

Scenario: Builders are saying that construction timelines are short and it is not possible to design more efficient buildings because it is too complicated. *What changes in building design can enable more energy efficiency in buildings?*

© OECD/IEA 2018

Integrated design process

Sufficiency, efficiency, renewables


Tiered approach to integrated design

Design charrette



© OECD/IEA 2017


Path to zero emissions or net zero energy buildings

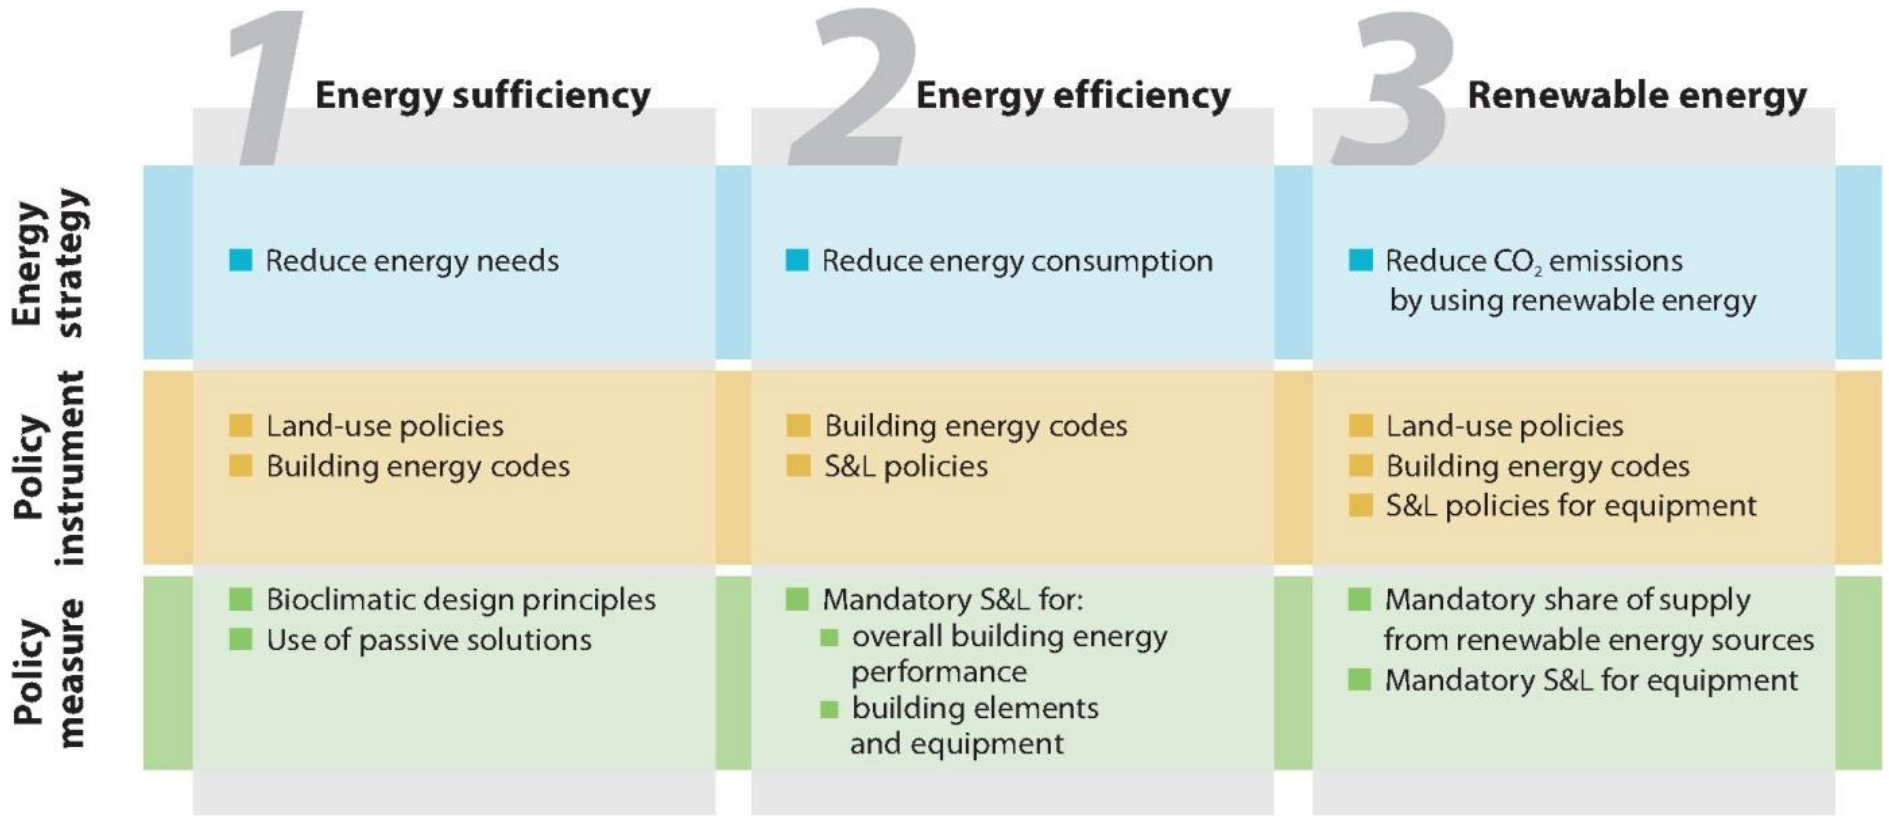

Source: www.iea.org/publications/policypathwaysseries/

© OECD/IEA 2018

The tiered approach for the integrated design process

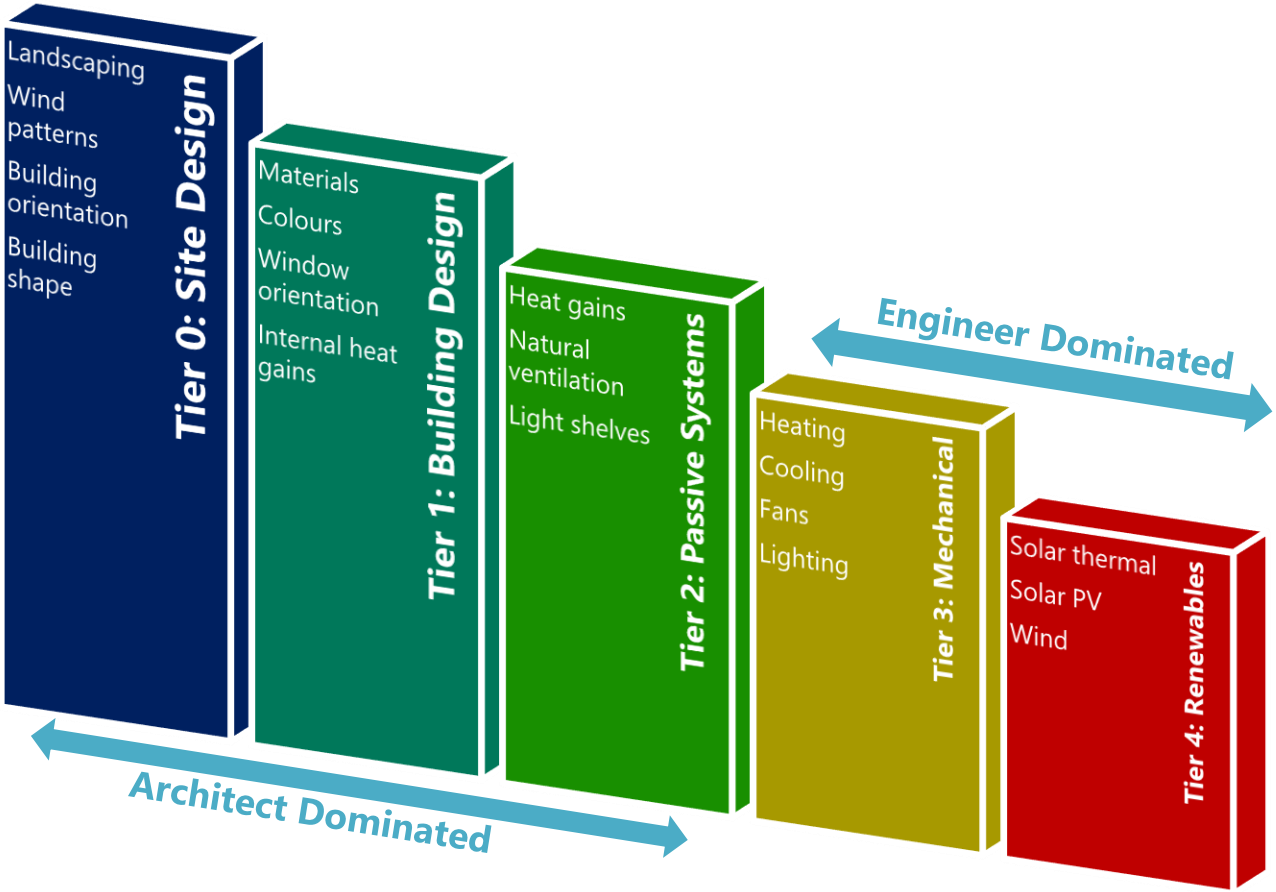

Integration of:

- Multiple design professionals
- Multiple aspects of building design and construction

Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects


© OECD/IEA 2018


Integrated Design Process: Tier 0 – Site Design



Landscaping

- Impact on solar gains on building
- Impact on airflow
- Seasonal variation



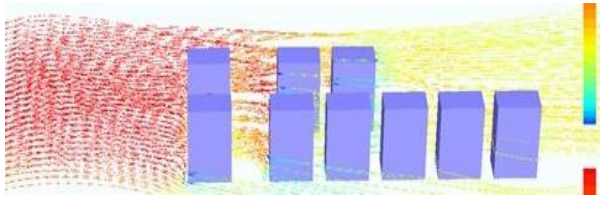


Wind patterns

- Dominant wind direction in hot summer
- Layout of buildings for natural ventilation potential

Building orientation & building shape

- Solar gains on facades
- Optimal orientation of facades

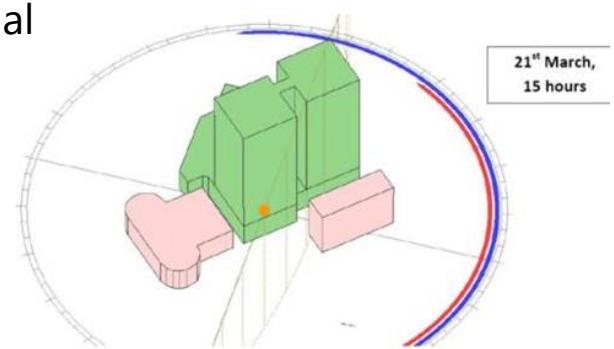

Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects

© OECD/IEA 2018


Integrated Design Process: Tier 0 – Site Design




Facade orientation

- Crucial, especially for long buildings
- Account for annual solar gains by orientation

Isometric view from South West

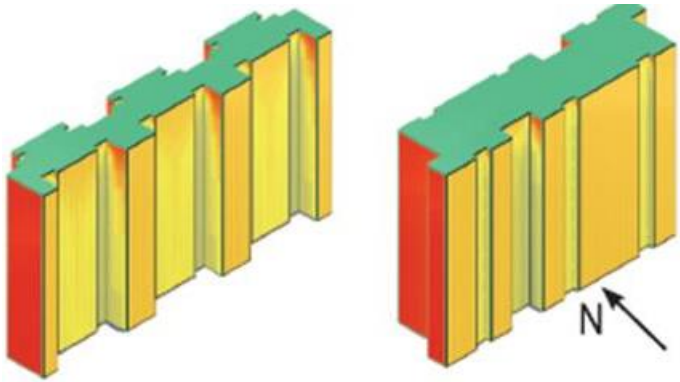

Long facades facing South and North

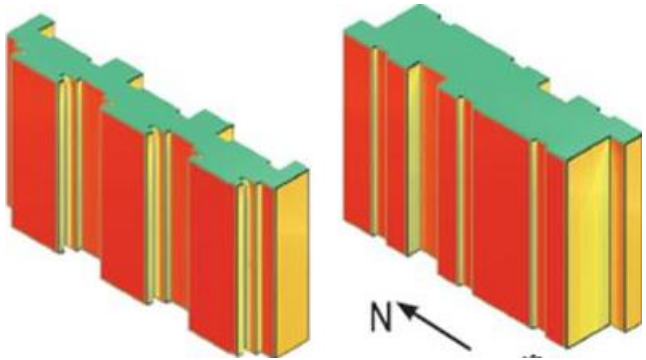

Long facades facing East and West

Source: India BEEP and India BEE. Design Guidelines For Energy-Efficient Multi-Storey Residential Buildings (Composite and Hot-Dry Climates)


© OECD/IEA 2018




Influence of buildings on wind velocity

- Building shape, size and layout all influence wind speeds

Air velocity when wind is perpendicular to building facade orientation

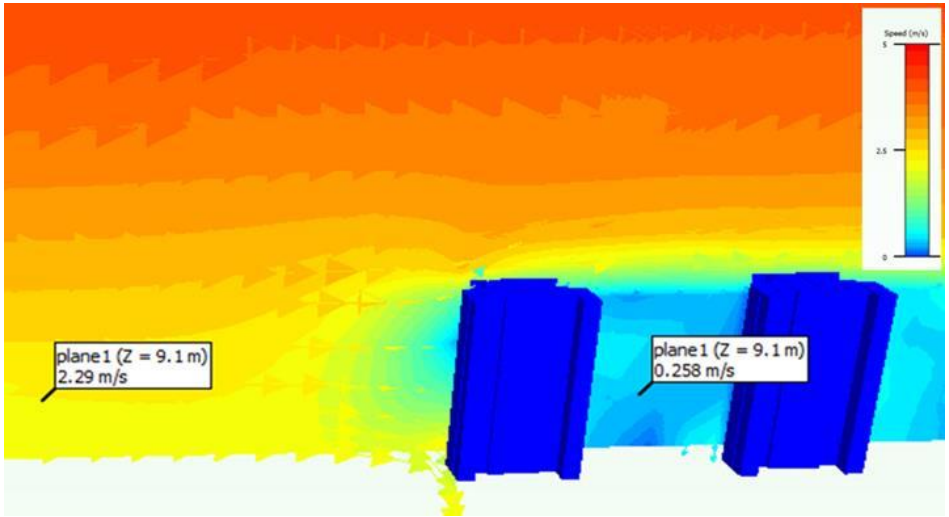

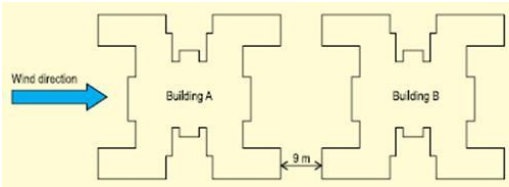


Source: India BEEP and India BEE. Design Guidelines For Energy-Efficient Multi-Storey Residential Buildings (Composite and Hot-Dry Climates)

© OECD/IEA 2018

Integrated Design Process: Tier 0 – Site Design

Example wind distribution for a project in Indore (DB Pride)



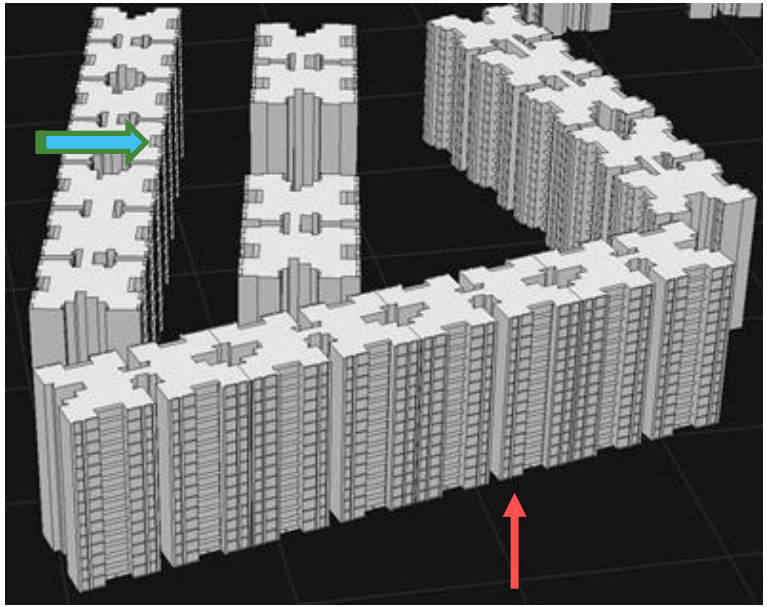

View from the South / Main wind from the West




Source: India BEEP

© OECD/IEA 2018

Integrated Design Process: Tier 0 – Site Design



Example wind distribution for a project in Indore (DB Pride)

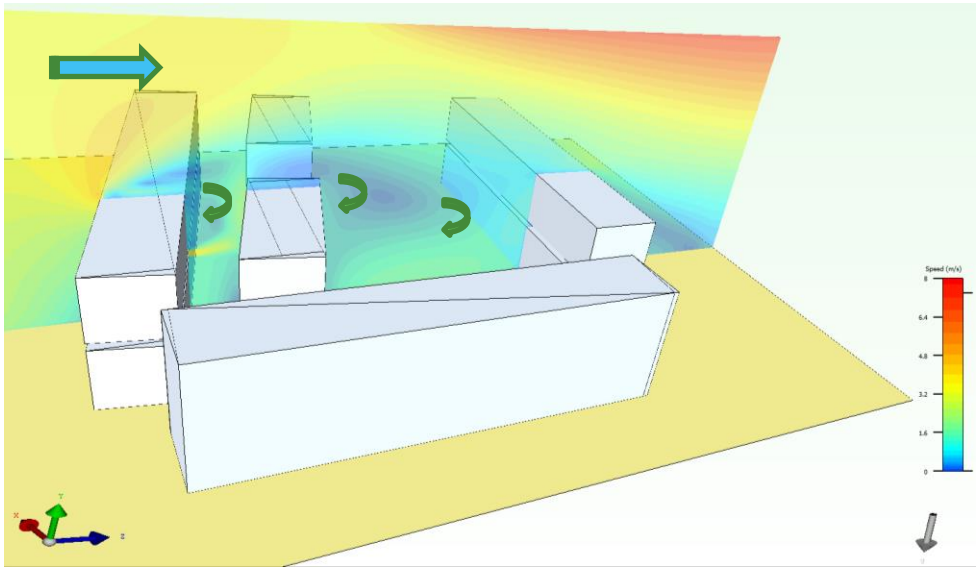

Using wind speed for natural ventilation

- **Low-density projects:** influence cross (horizontal) and stack (vertical) ventilation
- **High density projects:** there is low wind speed between buildings, but you can use wind speed on the roof to increase suction on vertical shafts for increased stack ventilation.

Source: India BEEP and India BEE. Design Guidelines For Energy-Efficient Multi-Storey Residential Buildings (Composite and Hot-Dry Climates)

© OECD/IEA 2018

Integrated Design Process: Tier 1 – Building Design



Walls, windows, shading and solar gains

- Wall should be designed to have insulation
- Window area should be limited to 10-30% of the wall area
- Windows should be highly efficient, particularly if more than 25% of the wall area (both thermal protection and solar protection)
- Shading with overhangs should be designed based on solar angles (i.e. typically overhangs are more effective on North and South walls)
- Shading with movable external shades can be highly effective for optimized daylighting and controlling solar gains.
    - Shutters
    - Movable blinds

(technologies are described in more detail in the next session)

Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects

© OECD/IEA 2018

Integrated Design Process: Tier 1 – Building Design



Building envelope is often the main source of heat gain/loss

- Walls, windows, roof, uncontrolled air infiltration
- There is a wide variation in the quality of building envelopes:



U ~ 3.5 W/m^2.K
Monolithic concrete wall



U ~ 0.5 W/m^2.K

35% Windows with inadequate shading



10% Windows with shading



Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects


© OECD/IEA 2018


Integrated Design Process: Tier 1 – Building Design

Building envelope is often the main source of heat gain/loss

- Window area has a significant impact on cooling energy use:



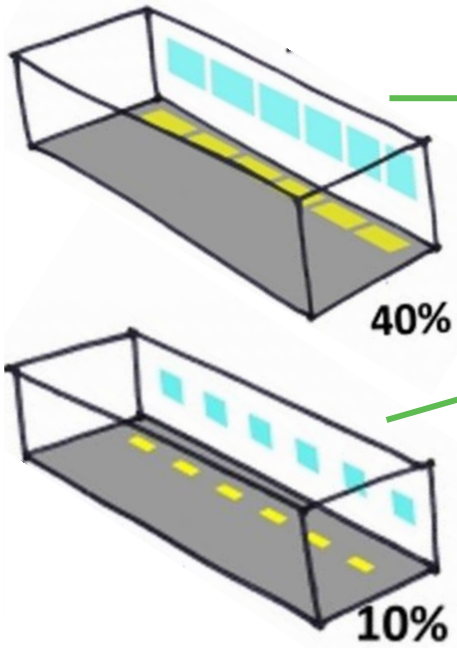

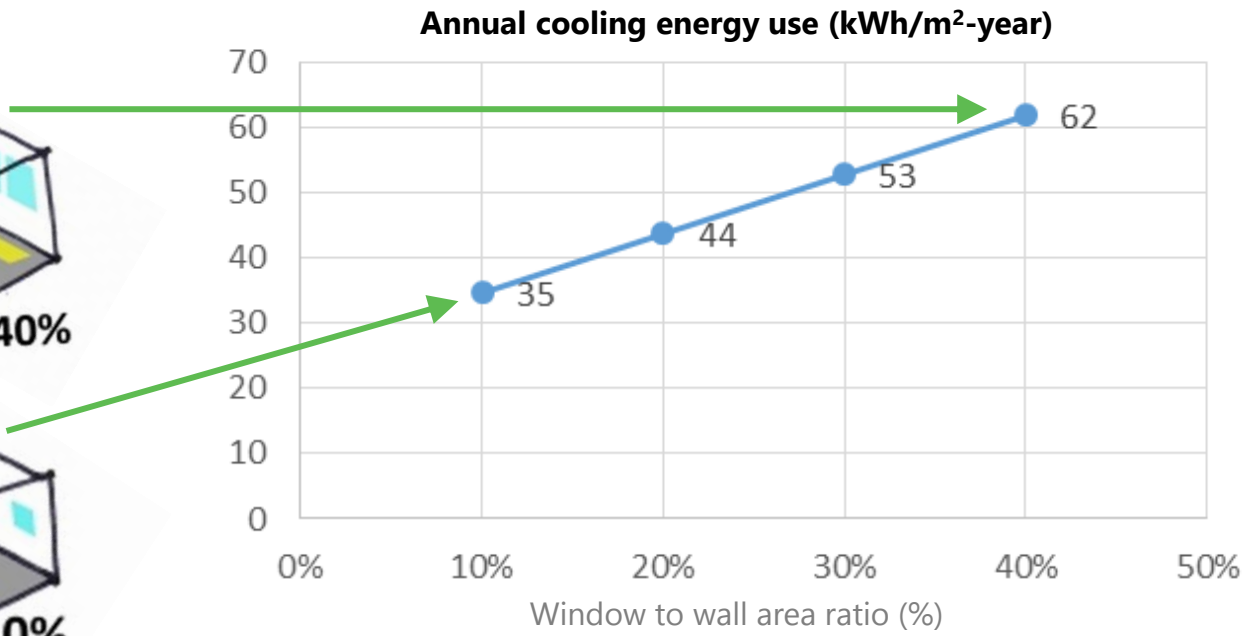

Source: BEEP India

© OECD/IEA 2018

Integrated Design Process: Tier 2 – Passive Systems



Passive systems are reliant on Tier 0 (site design) and Tier 1 (building design), and include:

- Passive cooling
  - Evaporative cooling (airflow and water)
  - Ventilative cooling (natural ventilation)
  - Earth tunnel (underground)
- Passive heating (trombe wall and greenhouse effect)
- Passive lighting (daylighting)

Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects

© OECD/IEA 2018

Integrated Design Process: Tier 2 – Passive Systems





"ancient" architecture
(low window to wall ratio, natural ventilation, …

"modern" architecture
70-100% glazed, no natural ventilation, all air systems





"sustainable" architecture
15-40% window to wall ratio, natural ventilation, external movable solar protection, radiant cooling

Source: BEEP India

© OECD/IEA 2018

Integrated Design Process: Tier 3 – Mechanical Systems

After all of the passive options are used, mechanical systems can deliver the designed comfort:

- Active heating systems
- Active cooling systems
- Fans
- Active lighting

(technologies are described in more detail in the next session)




Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects

© OECD/IEA 2018

Integrated Design Process: Tier 4 – Renewable Energy

To deliver net zero energy or emissions, renewable energy can be used to provide all on-site energy needs

- Solar thermal
  - Typically for hot water or heating
- Renewable electricity
  - Solar photovoltaic
  - Wind
  - Purchased renewable energy

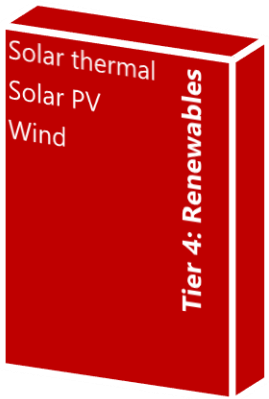


Source: Adapted from Lechner, Norbert: Heating, Cooling, Lighting : Sustainable Design Methods for Architects

© OECD/IEA 2018

Integrated design process: Design Charrette

Experience shows:

- Cost-effective and energy efficient design (25-40% energy savings at no/ marginal cost increase) is possible if the **architect, engineer and client** work together in a Design Charrette/Workshop during the early design phase.
- More savings are achieved when the **architects and engineers** continued to work together in the design phase.

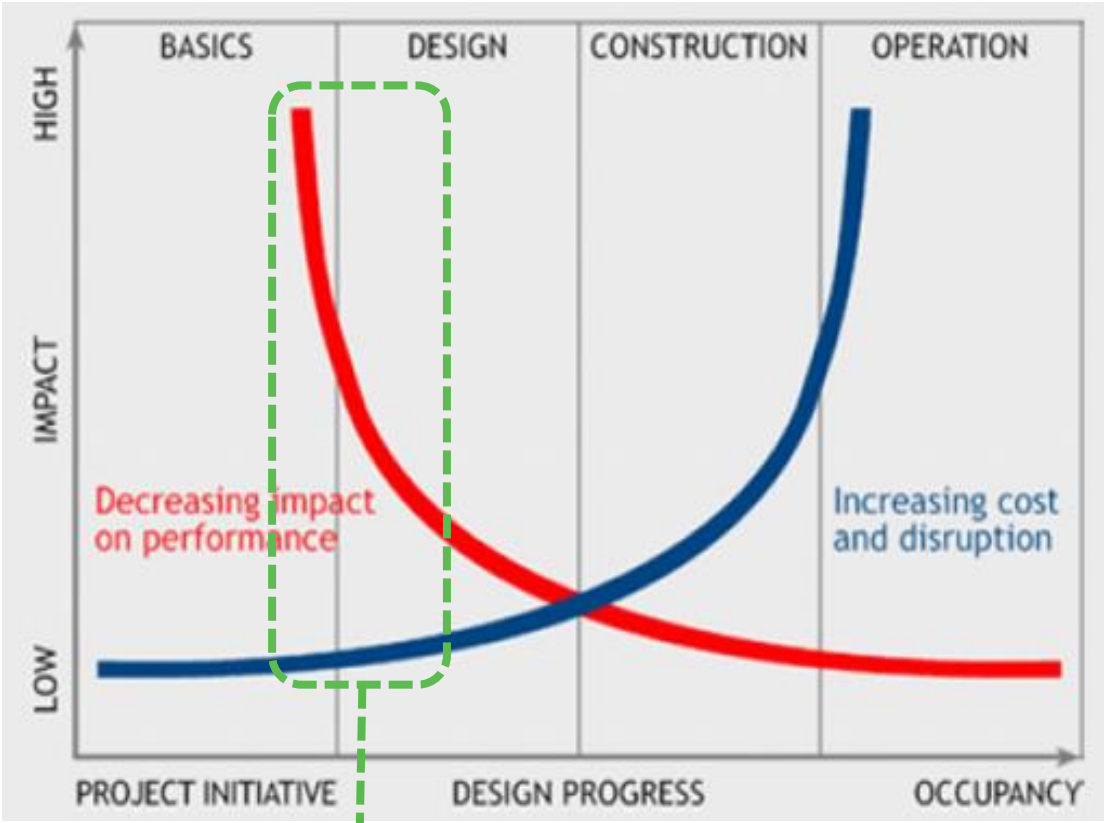

Source: BEEP India and IEA Task 23 Optimization of Solar Energy Use in Large Buildings, 2003


© OECD/IEA 2018


Integrated design process: Design Charrette

Building energy modelling

- Should be used throughout the design process from schematic design (early) to construction (end of design) to understand the impact of design decisions
- At the early design stage, use *simplified models* or *simplified modelling*:
  - **Simplified model**: such as using "wizard mode" in eQUEST that pre-fills information so that you do not have to enter in all data.
  - **Simplified modelling**: such as modelling one zone of the building

eQUEST ... the QUick Energy Simulation Tool

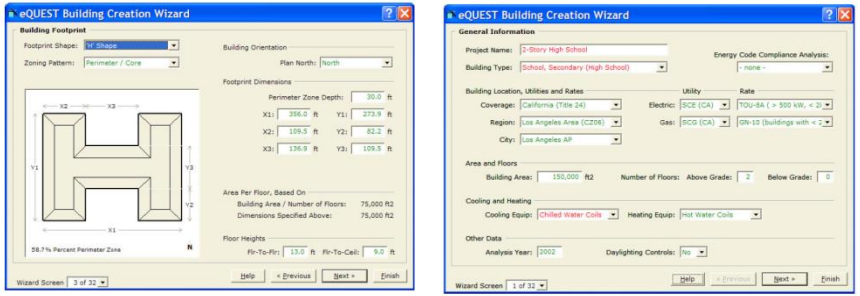

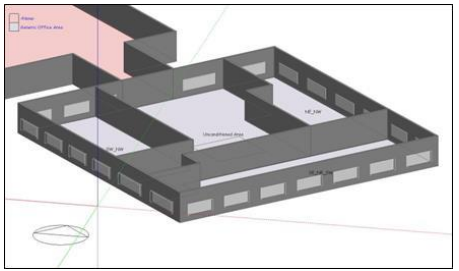

Source: BEEP India and DOE2.com

© OECD/IEA 2018

Integrated design process: Design Charrette

Example: high rise office building for France Ministry of Ecology

Option 1 (reference case): Square deep floor plate, poor envelope, no dynamic solar shading, mechanical ventilation without heat recovery

Option 2 (high performance): Square shallow floor plate, good quality envelope, dynamic solar shading (SHGC=15%), mechanical ventilation with heat recovery, natural ventilation on the peripheral zones



	Option 1	Option 2	Option 3	Option 4
Specific electricity for mechanical ventilation	20.9	6.7	6.7	5.5
Specific electricity for lighting	18.1	16.7	11.1	11.1
Specific cooling requirements	51.1	40.6	25.9	19.1
Specific heating energy	62.3	7.9	12.2	10.1

Option 3 ("bioclimatic" design): shallow floor plate (15.4 m depth), good quality envelope, dynamic solar shading (SHGC=15%), mechanical ventilation with heat recovery, natural ventilation on the peripheral zones

Option 4 ("bioclimatic" design with cross ventilation): shallow floor plate (15.4 m depth), good quality envelope, dynamic solar shading (SHGC=15%), mechanical ventilation with heat recovery, natural ventilation between peripheral and central zones

Source: BEEP India


© OECD/IEA 2018

Integrated design process: Design Charrette

Example: thermal comfort without active cooling



Low cost housing project Smart Ghar

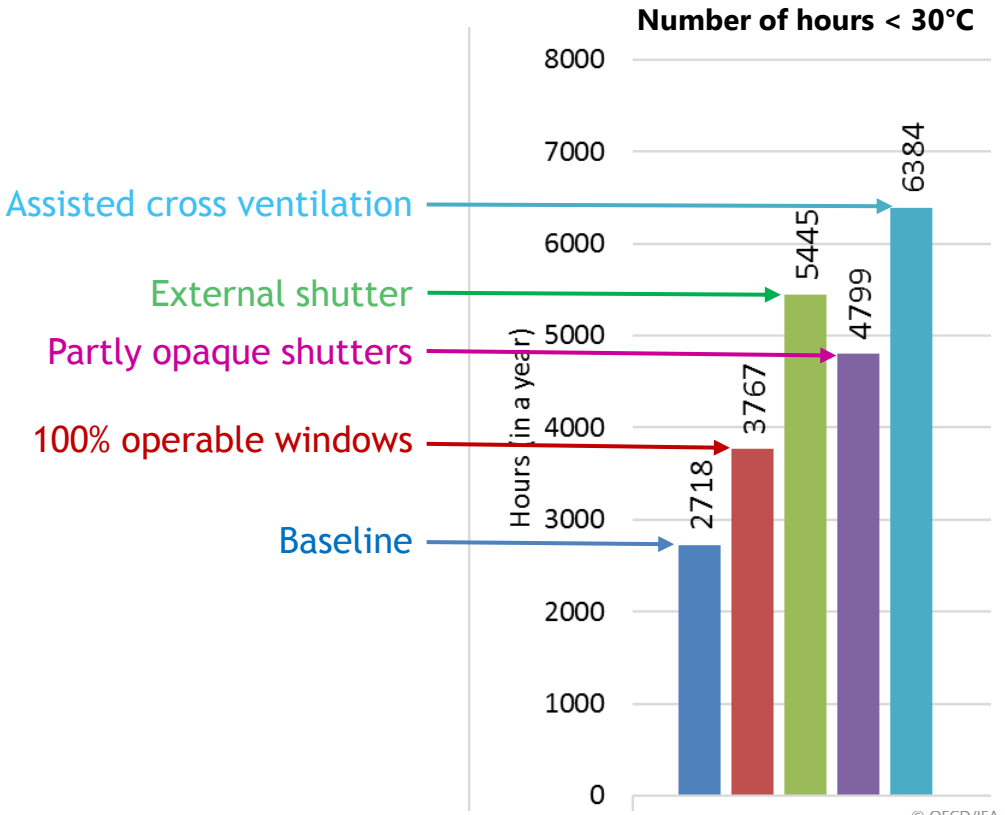

Source: BEEP India

© OECD/IEA 2018

Design, Construction and Commissioning:

- **Simplified:** typically for small residential and other small projects in developing economies.
- **Detailed:** typically for large projects (both residential and commercial)

The design process and investment decision processes are different depending on the total effort by designers and developers.

- The larger the project, the *larger the opportunity for energy efficiency*
- The larger the project, the *better opportunity for integrated design*

© OECD/IEA 2018

Design, construction and measurement standardisation

Capital gap and performance gap

Investment Ready Energy Efficiency



© OECD/IEA 2017

The energy efficiency capital gap

Projects

- Untapped market opportunity
- Healthy returns
- Established industry
- Excess capacity



Investors

- Search for yield
- Risk/return
- Growing emphasis on impact investing
- Growing interest in EE



Source: Investor Confidence Project

© OECD/IEA 2018

The performance gap

Why Don't Green Buildings Live Up to Hype on Energy Efficiency?

Analysts call it the "energy performance gap" – the difference between promised energy savings in green buildings and the actual savings delivered. The problem, researchers say, is inept modeling systems that fail to capture how buildings really work.

BY RICHARD CONNIFF · MAY 25, 2017

Not long ago in the southwest of England, a local community set out to replace a 1960s-vintage school with a new building using triple-pane windows and super-insulated walls to achieve the highest possible energy efficiency. The new school proudly opened on the same site as the old one, with the same number of students, and the same head person– and was soon burning more energy in a month than the old building had in a year.

© OECD/IEA 2018

Lack of standardisation results in:

Greater performance risk

Uncertainty limiting demand

Higher transaction costs

Difficult to build capacity

Difficult to aggregate

Source: Investor Confidence Project

© OECD/IEA 2018

What owners and investors want



- Clear and transparent construction or renovation project plan based on industry best practices
- Evidence of the qualification of professionals
- Third-party measurement and verification
- Consistent documentation
- A project label that represents these components and can live with the project

Source: Investor Confidence Project

What does a standardised approach looks like?



Source: Investor Confidence Project


© OECD/IEA 2018

What does a standardised approach looks like?

Baselining → Savings Projections → Design, Construction, Verification → Operations, Maintenance, Monitoring → Measurement & Verification (M&V)

Baselines provide a reference regarding energy use, allowing for prediction of energy consumption in different scenarios, and for energy savings calculations.

- Develop 12 month energy consumption baseline
- Determine energy use by end-use
- Building performance
- Weather data
- Occupancy data

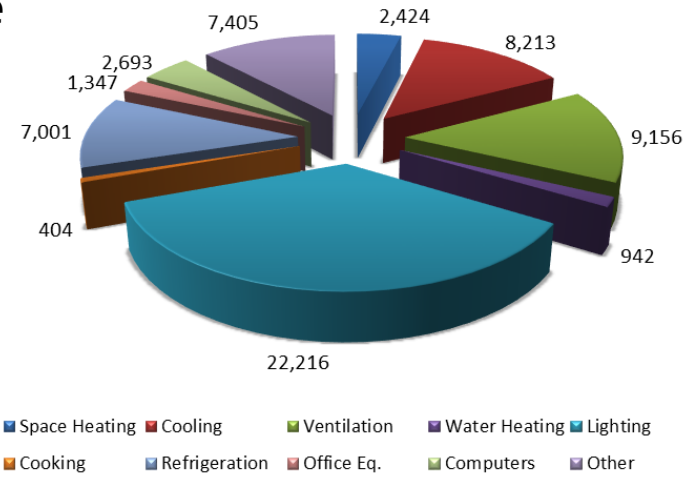

Source: adapted from Investor Confidence Project

© OECD/IEA 2018

What does a standardised approach looks like?

Baselining | **Savings Projections** | Design, Construction, Verification | Operations, Maintenance, Monitoring | Measurement & Verification (M&V)

Savings calculations provide important information for project valuation and for the determination of the energy efficiency measures to be implemented.

- Energy modeling software
- Modeler credentials
- Supporting model files and model calibration
- Key metric benchmarks
- Energy efficiency measures model variables
- Individual and packaged energy savings results



Source: adapted from Investor Confidence Project

What does a standardised approach looks like?



Design, construction and verification are all crucial phases. Procedures and documentation of these processes is key to investor confidence.

- Operational performance verification plan
- Commissioning
- Inspection and spot measurements
- Data logging
- Training
- Systems manual



Source: adapted from Investor Confidence Project


© OECD/IEA 2018

What does a standardised approach looks like?

Baselining | Savings Projections | Design, Construction, Verification | **Operations, Maintenance, Monitoring** | Measurement & Verification (M&V)

The way that buildings are operated and maintained impact their energy performance, and monitoring this information is key to performance guarantees.

- OM&M plan and management framework
- OM&M process
  - Inspections
  - Retro commissioning
  - Ongoing commissioning
  - Monitoring-based commissioning
- Operator's manual and training

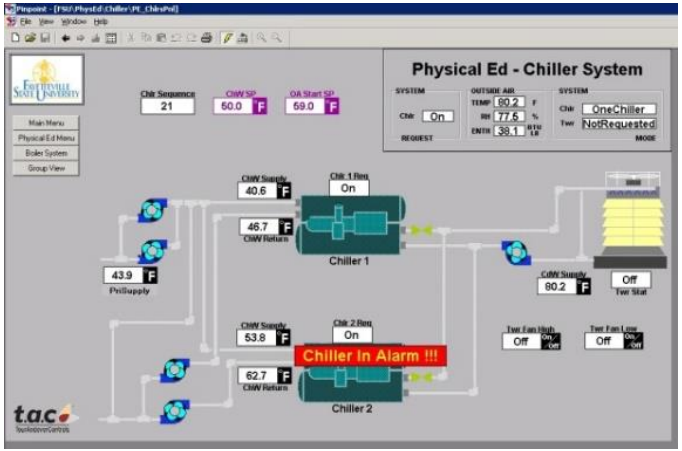

Source: adapted from Investor Confidence Project


© OECD/IEA 2018

What does a standardised approach looks like?



Proper measurement and verification procedures validate the reliability and effectiveness of predicted energy savings.

- M&V provider credentials
- Options A and B: retrofit isolation
- Option C: utility bill analysis
- M&V report

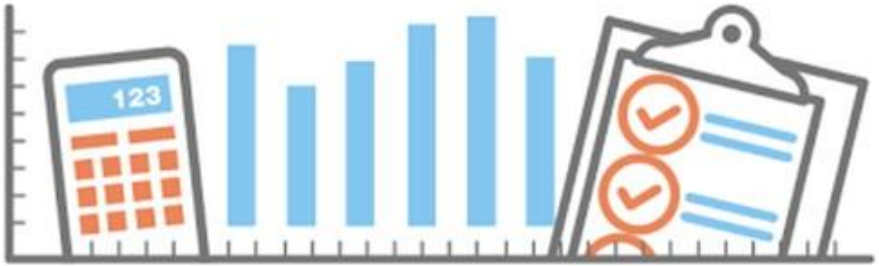

Source: adapted from Investor Confidence Project

© OECD/IEA 2018

Standardised approach

Does NOT:

- Invent new standards
- Attempt to impose national standards in another country
- Restrict engineering solutions
- Define a set level of energy savings

Does:

- Increase deal-flow in the near-term
  - Increase confidence in savings
  - Reduce transaction costs



- Reduce risk and costs in the long-term
  - Attract project finance investors
  - Reduce cost of capital



Source: Investor Confidence Project

© OECD/IEA 2018

Investor Ready Energy Efficiency (IREE)

An international framework for reducing owner and investor risk, lowering due diligence costs, increasing certainty of savings achievement and enabling aggregation.




The IREE™ Certification ensures transparency, consistency and trust-worthiness through **best practice and independent verification.**

Source: Investor Confidence Project

© OECD/IEA 2018

Investor Ready Energy Efficiency (IREE)

An international framework for reducing owner and investor risk, lowering due diligence costs, increasing certainty of savings achievement and enabling aggregation.

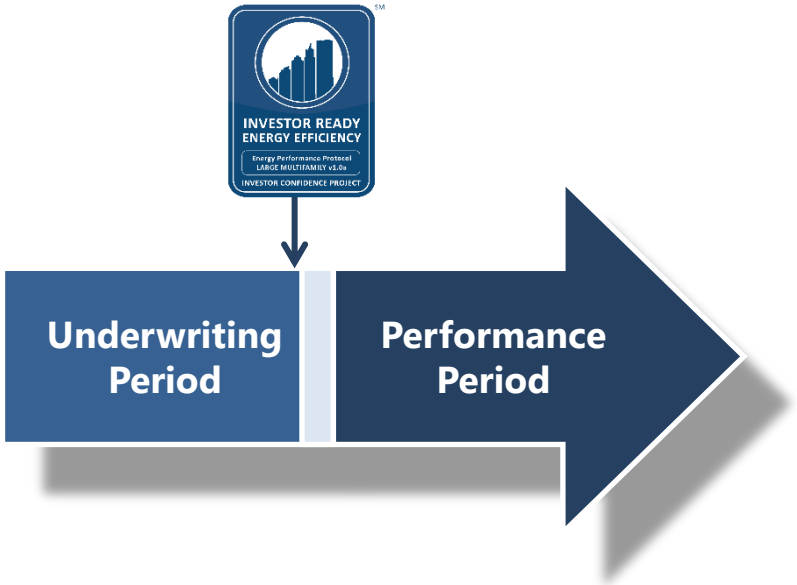

The IREE™ Certification is **delivered prior to investment decision**

Source: Investor Confidence Project

© OECD/IEA 2018

Scenario:

Builders are saying that construction timelines are short and it is not possible to design more efficient buildings because it is too complicated.

What changes in building design can enable more energy efficiency in buildings?

© OECD/IEA 2018



www.iea.org

IEA

© OECD/IEA 2018